



STANDARD SPLIT RIVETS AND DRIVE SCREWS


Nom. Shank Dia.	Shank Dia. D	Nom. Head Dia.	Head Dia. A	Head Thick H	D Clinch Allow
3/32	.085 .089	9/64	.138 .145	.026 .030	.062
3/32	.085 .089	5/32	.154 .159	.026 .030	.062
1/8	.116 .121	7/32	.216 .221	.036 .040	.093
1/8	.116 .121	5/16	.307 .312	.055 .063	.093
9/64	.144 .152	5/16	.306 .318	.035 .045	.120
5/32	.150 .155	5/16	.310 .316	.047 .051	.125
5/32	.150 .155	3/8	.373 .380	.064 .068	.125
3/16	.180 .190	5/16	.306 .318	.041 .051	.156
3/16	.180 .190	3/8	.369 .381	.058 .068	.156
1/4	.230 .240	7/16	.426 .431	.099 .104	.187
9/32	.274 .289	1/2	.464 .504	.114 .138	.210

OVAL HEAD

TRUSS HEAD

Prices on countersunk head and special split rivets are available on request.

DRIVE SCREWS - ROUND HEAD TYPE U

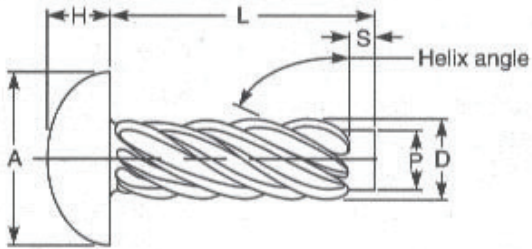

Available in steel and stainless steel.
L (length) dimension determined by customer.

Nominal Screw Size	Number of Thread Starts	D		A		H		P		Recommended Hole Size	
		Outside Diameter		Head Diameter		Head Height		Pilot Diameter		Drill Size No.	Hole Diameter
		Max	Min	Max	Min	Max	Min	Max	Min		
00	6	.060	.057	.099	.090	.034	.026	.049	.046	55	.052
0	6	.075	.072	.127	.118	.049	.041	.063	.060	51	.067
2	8	.100	.097	.162	.146	.069	.059	.083	.080	44	.086
4	7	.116	.112	.211	.193	.086	.075	.096	.092	37	.104
6	7	.140	.136	.260	.240	.103	.091	.116	.112	31	.120
7	8	.154	.150	.285	.264	.111	.099	.126	.122	29	.136
8	8	.167	.162	.309	.287	.120	.107	.136	.132	27	.144
10	8	.182	.177	.359	.334	.137	.123	.150	.146	20	.161
12	8	.212	.206	.408	.382	.153	.139	.177	.173	11	.191
14	9	.242	.236	.457	.429	.170	.155	.202	.198	2	.221