




CLECO FASTENERS/TEMPORARY RIVETS

Cleco fasteners provide the quickest method for holding sheets together for drilling or riveting. Drill the size hole needed for the rivet and insert the sheet holder. The Cleco fasteners listed comprise the most common sizes. Material thickness range 0" - 1/4". Cleco fasteners are color coded for easy identification. Use with Cleco fastener pliers.

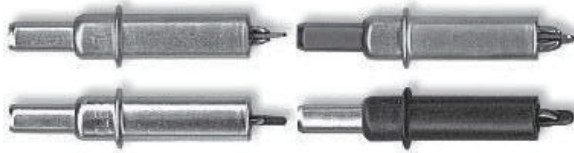

Cleco Fasteners



Cleco Pliers

Standard Style Cleco Fasteners

No.	Color	Grip	OAL	Size
CL-215	Zinc	0" - 1/4"	2 - 1/4"	3/32
CL-216	Copper	0" - 1/4"	2 - 1/4"	1/8
CL-217	Black	0" - 1/4"	2 - 1/4"	5/32
CL-218	Brass	0" - 1/4"	2 - 1/4"	3/16
CL-219	Copper	0" - 1/4"	2 - 1/4"	1/4

Stubby Cleco Fasteners

No.	Color	Grip	OAL	Size
CL-457	Zinc	0" - 1/4"	1" - 3/4"	3/32
CL-458	Copper	0" - 1/4"	1" - 3/4"	1/8
CL-459	Black	0" - 1/4"	1" - 3/4"	5/32
CL-460	Brass	0" - 1/4"	1" - 3/4"	3/16

Long Style Cleco Fasteners

No.	Color	Grip	OAL	Size
CL-453	Zinc	1/4" - 1/2"	2" - 1/2"	3/32
CL-454	Copper	1/4" - 1/2"	2" - 1/2"	1/8
CL-455	Black	1/4" - 1/2"	2" - 1/2"	5/32
CL-456	Brass	1/4" - 1/2"	2" - 1/2"	3/16

Extended Grip - Heavy Duty Cleco Fasteners

No.	Color	Grip	OAL	Size
CL-461	Zinc	0" - 1/2"	2" - 1/2"	3/32
CL-462	Copper	0" - 1/2"	2" - 1/2"	1/8
CL-463	Black	0" - 1/2"	2" - 1/2"	5/32
CL-464	Brass	0" - 1/2"	2" - 1/2"	3/16